
Ailunce HA1UV/HA1G Firmware Update Operation

For Ailunce HA1UV/HA1G, the firmware can be update via the software.


Firstly, download the Retevis HA1UV/HA1G CPS and USB Driver, and the firmware update file from the following link:https://www.ailunce.com/Supports/HA1UV/Software

Secondly, Find "Firmware" under the Operation menu.



Then, connect the USB cable to your computer. Choose the correct COM port, and select model "HA1UV or HA1G".

Here please note that, the com port should display as below picture show:




Next, Select bin file "HA1UV-V1.01.10.009-20250109-app.bin" Or HA1G bin file.


Then, make the radio enter the DFU mode.

Keep the radio powered off, then press and hold the PTT and PF1 button together, then turn on the radio. It will enter the DFU mode, and the indicator is red.



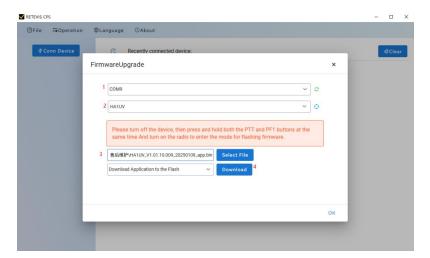

Next, click the "Download" button to start the firmware process.

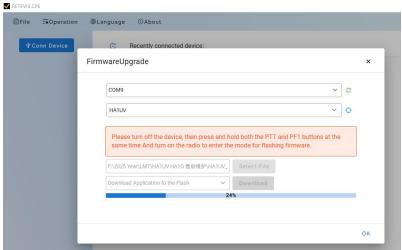

The radio will be restart after the firmware update is successfully.

Check the firmware version on the radio:

Menu-Radio-the 11th menu "radio information".

